






45
PSI
MAX PRESSURE



QUIET
MOTOR



PSI / BAR / KPA

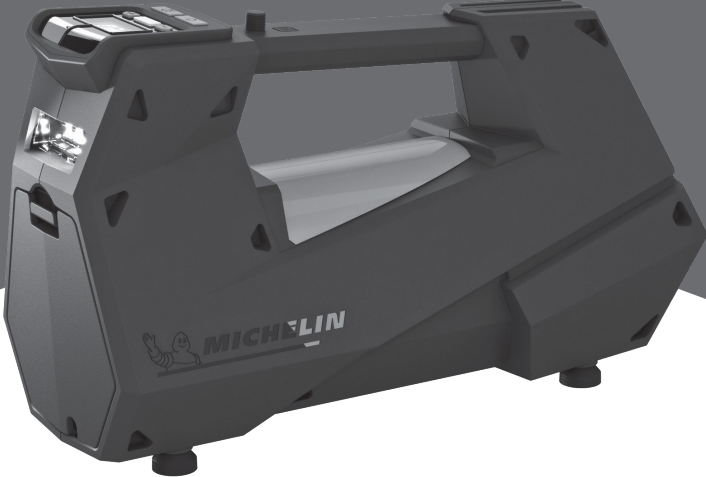



4:00
MINS
QUICK
INFLATION*



PRESSURE
PRE-SET



TRUCK / SUV / RV

12310 TRUCK/SUV/RV DIGITAL
TIRE INFLATOR

USER GUIDE

12310UG
11/23

THANK YOU FOR PURCHASING THE
MICHELIN TRUCK/SUV/RV DIGITAL TIRE INFLATOR

Read the operating instructions before using the inflator. Improper use can cause damage or harm to you and/or your property. When using the inflator, park the vehicle in a safe location, off the roadway with the handbrake engaged.

 Only suitable for vehicles with a negative ground. Check your vehicle owner's manual.

- This inflator can inflate vehicle tires up to 45 PSI (please follow your vehicle manufacturer's recommendations) and bicycle tires up to 100 PSI.
- Use the included adapters to safely inflate low-pressure items such as sports balls and small inflatable toys.

Max power requirement during normal use: 14A / 168W.

 **WARNING! COMPRESSED AIR CAN BE DANGEROUS**

- The inflator should not be used by anyone unfamiliar or inexperienced with its use.
- Use with caution around children. The inflator is neither safe nor intended for use by children.
- Never leave unattended when running.
- Never overinflate.
- Always use in a safe area away from traffic and other dangers.

Never run continuously for more than 10 minutes. After each 10-minute run allow inflator to cool for 10 minutes.

 **WARNING! ENSURE CORRECT TIRE PRESSURES**

- Correct tire pressure is vital for road safety.
- Under or overinflated tires can be dangerous.
- Perform weekly checks to ensure tires meet manufacturer's recommended pressure. This should include the spare, but exclude space saver tires. Always check before a long distance trip or after loading or unloading the vehicle.
- Always check air pressures in an ambient temperature, never immediately after a long distance trip.

 **CAUTION**

- Inspect the inflator before each use.
- The cigarette lighter power outlet should be dust and debris-free or overheating may result.
- If your 12V power outlet has a fuse rated at 10A or less, the wiring in your vehicle will not support this product.
- Do not leave the device unattended whilst connected to 12V DC socket.
- Do not kink or block the air hose while the inflator is in operation.
- Do not use the inflator or any of its components if bent, broken, melted, burned or wet.
- Only use the adapters supplied with the device.
- The inflator contains no user serviceable parts – DO NOT OPEN.

TRUCK/SUV/RV DIGITAL TIRE INFLATOR

OPERATING FEATURES

1. PSI, BAR & kPa / Reset button

2. White LCD digital display

3. Superbright LED Light

4. Storage compartment

5. Cushioned feet for stability

6. 118" inches (approx.) power cord with fused 12V power plug

7. LED Light On/Off button

8. On/Off button

9. Tire valve dust cap holder

10. Pressure pre-set buttons

11. Tire valve connector

12. 25.5" inches (approx.) high pressure air hose

13. Bleed valve

14. Adapters (snap-in storage). Located in storage compartment (4)

SPECIFICATIONS

Max pressure:	Up to 45 PSI for vehicle tires (please follow your vehicle recommendations)
Pressure accuracy:	Backlit pressure gauge (+/- 1 PSI up to 50 PSI, +/- 2 PSI > 50 PSI to 80 PSI)
Pressure resolution:	PSI / BAR / kPa
Max current:	14A / 168W
Fuse size:	15A glass
Hose length:	25.5" inches (approx.)
Power cord:	118" inches (approx.)

TO INFLATE VEHICLE TIRES

1.

Unwind the power cord completely from the storage compartment (4) and plug into your vehicle's 12V power socket (some vehicles may require the ignition to be on to supply power). The compartment door can be replaced as there is a cut-out for the power cord to avoid loss or damage. After a few seconds, the digital display (2) will zero. Press and hold the reset button (1) for approx 5 seconds; all the digits will be displayed again momentarily and return to 0.00.

2.

Press the PSI, BAR & kPa button (1) to select the desired pressure format.

3.

Remove the tire valve dust cap and store on the holder on top of the inflator (9). Make sure your tire valve is clean before removing the high pressure hose from its storage clip.
Note: always make sure you connect the 12V power plug before connecting the high-pressure hose to your tire valve. Screw on the tire valve connector (11) — once connected, the digital display (2) will show your current tire pressure. If the display shows 0.00 or Err refer to the Trouble Shooting Guide. If this is the correct pressure stated in your vehicle's handbook, remove the tire valve connector (11) and replace your dust cap.

4.

If the tire is below the recommended pressure (as specified in your vehicle's handbook) scroll up or down using the  (or ) buttons (10) to set the correct tire pressure. Hold either button down for 1 second to quickly increase/decrease the pre-set pressure.

5.

The high pressure air hose is fitted with a bleed valve (13) that allows you to lower the pressure of the tire if it goes above the recommended PSI. The digital display (2) will indicate when it reaches the correct pressure.

6.

Switch on the inflator. The tire which will now inflate to the selected pre-set pressure. The inflator may continue to run for a few seconds when it has reached the selected pressure, this is a feature of the built-in pressure sensor to ensure the correct pressure has been reached.
Note: Although the inflator is fully automatic do not leave unattended whilst it is inflating.

7.

If you are inflating multiple tires follow steps 3 to 6 above. If the 12v power supply (6) is disconnected, always reconnect the 12V power supply (6) before connecting the high pressure air hose (12) to the tire valve. Remember, you may have to reset the pre-set pressure as some vehicles have different pressures between front and rear tires, (as specified in your vehicle's handbook). If there is a power interruption during the inflation cycle, follow the reset procedure outlined in the Trouble Shooting Guide.

Note: The inflator will default to the PSI pressure format when the unit has been removed from the power source.


1.

2.

3.

ADAPTERS


Included with your MICHELIN Truck/SUV/RV Digital Tire Inflator, at the front of the unit, is a storage compartment for the power cord. The storage compartment lid (4) holds various adapters designed for inflating other items.

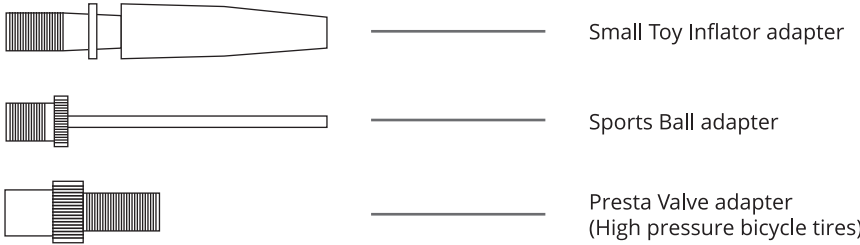


12V POWER PLUG

TO REPLACE THE FUSE IN THE 12V PLUG:

Unscrew plastic nose counterclockwise

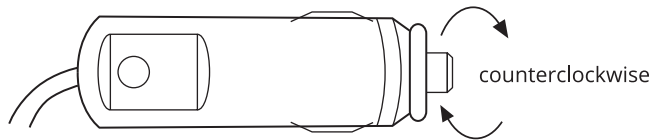

Replace the fuse with the same 15A rating. Screw back on the plastic nose

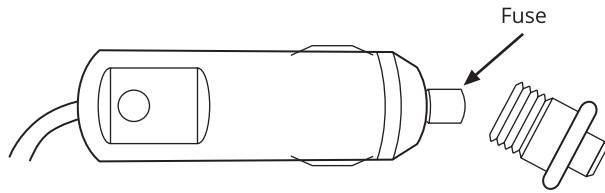

4.

TYPICAL INFLATION PRESSURE

	5 - 13 PSI
	22 PSI
	35 - 50 PSI (Mountain bike) 90 - 100 PSI (Road bike)
	34 PSI
	28 - 40 PSI

CONVERSION CHART

PSI	BAR	kPa
10	0.69	69
20	1.38	138
30	2.07	207
40	2.76	276
50	3.45	345
60	4.14	414
70	4.83	483
80	5.52	552
90	6.21	621
100	6.89	689

5.

TROUBLESHOOTING

Gauge does not illuminate	■ Check that the plug is fully inserted into the 12V socket.
Unit fails to run with switch in 'On' position	■ Check internal fuse (15A glass type). ■ Your car may require the ignition key to be turned to the accessory position.
Power lead/plug becomes hot	■ If power lead is coiled, uncoil to full length. ■ Ensure 12V socket is clean with no debris in it. ■ Ensure 12V plug components are tight and clean.
Gauge appears to read incorrectly or is unreadable	■ When the tire valve connector is attached, before switching the unit on, ensure the gauge is reading your current tire pressure.
Gauge reads 0.0 or ERR	■ Disconnect valve connector from the tire. Remove plug from power source for at least 5 seconds, reconnect to power. ■ Press and hold yellow reset button (1) until display shows all the digits then returns to 0.0. ■ Connect valve connector to tire.
Unit is running but tire is not inflating	■ Check that the tire valve connector is correctly fitted to the tire valve.
Gauge does not display when tire valve is connected	■ Ensure tire valve is correctly connected to the tire valve connector.
Unit displays ERR message	■ Connect the 12V power plug to the vehicle's 12V supply. Do not connect the valve connector to the tire valve. Allow the gauge to settle for a few seconds, press and hold the yellow reset button (1) for 5 seconds. This will reset the pressure sensor. If the problem persists the pressure sensor has failed - Please contact the Michelin helpline.
For all other issues please call customer support: +1(800) 403-0471	

6.

OTHER MICHELIN PRODUCTS AVAILABLE



LI-ION RECHARGEABLE VEHICLE INFLATORS



TIRE PRESSURE GAUGES

Scan the QR code to access further product information.

Customer inquiries:
We're at your service. Let us help you, find a better way forward.
Customer support:
+1(800) 403-0471
Michelin@tire-inflation.com

MICHELIN and/or the Michelin Man Device and/or BIBENDUM are trademark(s) owned by, and used with the permission of, the Michelin Group. © 2023 Michelin
Manufactured and distributed under license by Enrich International Company Ltd.
US representative office:16720 Chestnut Street #C City of Industry, CA 91748, USA

PLEASE RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE



One (1) year Limited Warranty

7.

